

## Appendix 1 - HDLC in Detail

**HDLC** (High level Data Link Control)

Modem, EIA-232,  
HDLC Framing and Procedures

### Agenda

- **Line Management, Modems**
- **Introduction HDLC**
- **Station Types, Modes of Operation**
- **Frame Format, Frame Types**
- **Protocol Procedures**
- **HDLC Classes**

© 2007, D.I. Manfred Lindner HDLC, v4.4 2

## Appendix 1 - HDLC in Detail

### Line Protocol Basics

- **line protocol basics already explained**
  - serial transmission techniques
    - bit-synchronization
    - asynchronous/synchronous transmission, encoding
    - frame-synchronization, bitstuffing
    - frame protection, error detection
  - connectionless versus connected oriented service
  - error recovery based on ARQ
    - IdleRQ, Continuous RQ
    - error control strategies (e.g. GoBackN)
    - sequence numbers
    - windowing
  - flow control

© 2007, D.I. Manfred Lindner

HDLC, v4.4

3

### Additional Issues

- **connection oriented service requires**
  - line management procedures in order to establish, to maintain and to clear a connection
- **in the early days of data communications**
  - analogous telephone network for data transport
    - Modem in order to transport digital data
  - line protocols must handle additional line management procedures
    - for support of half duplex physical lines
    - for support of multipoint lines
    - done with help of modem control functions
- **line protocol standards used today reflect this early days requirements**

© 2007, D.I. Manfred Lindner

HDLC, v4.4

4

## Appendix 1 - HDLC in Detail

### Modem

#### • Modulator / Demodulator

- modem adapts digital (rectangle) signals in order to be transported over analogous telephone network
  - limited bandwidth (200 - 3500 Hz)
- done by different modulation techniques
  - AM, FM, Phase-Modulation, QAM, Trellis-Code, etc.
- 1st Wave
  - Frequency Division Protocols, all rates to 2400 bits/s
    - Modems: advanced analog filters
    - Telco: pass audio frequencies of 200 Hz to 2.4 KHz
- 2nd Wave
  - 1st generation Echo Canceling Protocols, 9600 & 14400 bits/s
    - Modems: low cost DSPs
    - Telco: pass audio frequencies of 200 Hz to 2.4 KHz

© 2007, D.I. Manfred Lindner

HDLC, v4.4

5

### Modem (cont.)

- 3rd Wave
  - 2nd gen. Echo Canceling Protocols, rates to 28.8 Kbits/s
    - Modems: higher performing, low cost DSPs
    - Telco: pass audio frequencies of 200 Hz to 2.8 KHz
- 4th Wave
  - extending Echo Canceling Protocols, rates to 33.6 Kbits/s
    - Modems: higher performing, low cost DSPs
    - Telco: pass audio frequencies of 200 Hz to 3.1 KH
- 5th Wave
  - Digital stepping protocols, 34 Kbits/s to 56 Kbits/s
    - Modems: higher performing, low cost DSPs
    - Telco: pass audio frequencies of 200 Hz to 3.1 KHz,  
all digital path to subscriber line,  
64K PCM digital to analog conversion,  
limited loop length, no line conditioners

© 2007, D.I. Manfred Lindner

HDLC, v4.4


6

## Appendix 1 - HDLC in Detail

### Modem Control by EIA-232 / V.24

- **EIA-232 / V.24 standard**

- serial interface definition between a DCE and DTE
  - DTE (Data Terminal Equipment e.g. end system)
  - DCE (Data Circuit Terminating Equipment e.g. modem)
- for short distance and low speed connectivity
- specifies a set of physical lines and necessary electrical / mechanical aspects
  - data signals for serial transmission, control signals for modem (DCE) control, unbalanced transmission, connector
- also known as RS232-C/D/E, V.24/V.28

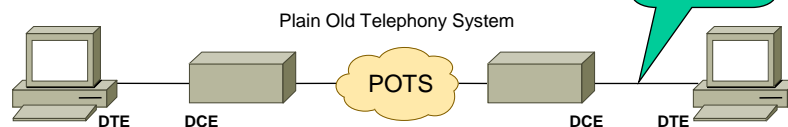

© 2007, D.I. Manfred Lindner

HDLC, v4.4

7

### EIA-232 Data and Control Signals

- data signals:
  - transport of serial data bitstream
  - TxD (Transmit Data) DTE -> DCE
  - RxD (Receive Data) DCE -> DTE
- control signals:
  - control function between modem and end system
  - RTS (Request To Send) DTE -> DCE
    - DTE requests permission to send data to modem
  - CTS (Clear To Send) DCE -> DTE
    - DCE grants permission to send
  - DCD (Data Carrier Detect) DCE -> DTE
    - DCE indicates that it is receiving carrier from remote modem
  - DSR (Data Set Ready) DCE -> DTE
    - DCE indicates that it is operational (the modem is powered on)

© 2007, D.I. Manfred Lindner

HDLC, v4.4

8

## Appendix 1 - HDLC in Detail

### EIA-232 Control Signals (cont.)


- control signals (cont.)
  - DTR (Data Terminal Ready) DTE -> DCE
    - DTE indicates that it is operational (the end system is powered on)
  - RI (Ring Indicator) DCE -> DTE
    - DCE indicates that the phone is ringing
  - Transmitter Signal Element Timing DCE -> DTE
    - used in synchronous mode to provide clock to the DTE for TxD
  - Receiver Signal Element Timing DCE -> DTE
    - used in synchronous mode to provide clock to the DTE for RxD
  - Transmitter Signal Element Timing Return DTE -> DCE
  
- EIA-232 specified limits:
  - Length: 15m, 30m
  - Speed: 20kbit/sec, 64kbit/sec / Practice: up to 200kbit/sec

© 2007, D.I. Manfred Lindner

HDLC, v4.4

9

### EIA-232 Pinout DB-25

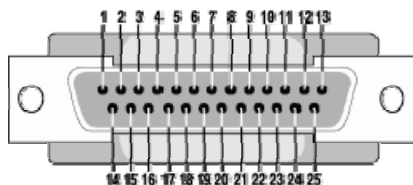

- 2 Transmit Data (TxD)
- 3 Receive Data (RxD)
- 4 Request to Send (RTS)
- 5 Clear to Send (CTS)
- 6 Dataset Ready (DSR)
- 7 Signal Ground
- 8 Data Carrier Detect (DCD)
- 15 Transmit Clock
- 17 Receive Clock
- 20 Data Terminal Ready (DTR)
- 24 Auxiliary Clock


© 2007, D.I. Manfred Lindner

HDLC, v4.4

10


## Appendix 1 - HDLC in Detail

### EIA-232 Pinout DE-9

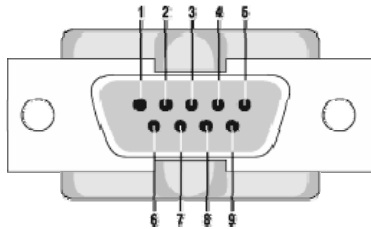

- 1 Data Carrier Detect (DCD)
- 2 Transmit Data (TxD)
- 3 Receive Data (RxD)
- 4 Data Terminal Ready (DTR)
- 5 Signal Ground
- 6 Dataset Ready (DSR)
- 7 Request to Send (RTS)
- 8 Clear to Send (CTS)
- 9 Ring Indicator (RI)

### EIA-232 Null Modem Cable

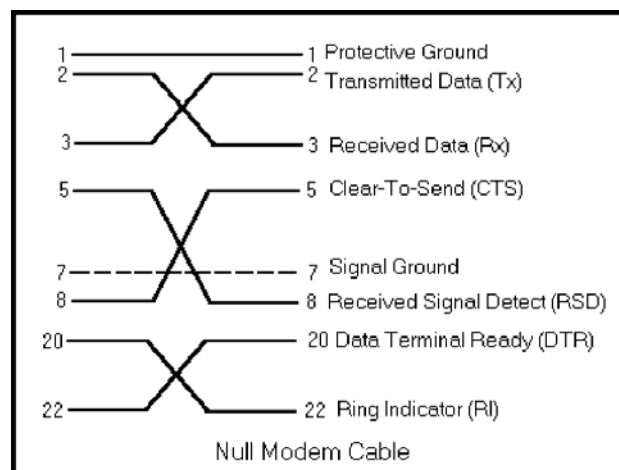

## Appendix 1 - HDLC in Detail

### Half Duplex Support


- **half duplex line means**
  - only one side can use physical line for transmitting (operation mode of old modems)
- **control of half duplex line**
  - right to use the physical line (right to send a frame) is exchanged between partners
    - could be compared with Token rotation in Token ring LANs
  - only possessor of the Token is allowed to send frames
    - P/F functions as Token in HDLC procedures
  - possessor of first Token is determined through a fixed Master - Slave relationship

© 2007, D.I. Manfred Lindner

HDLC, v4.4

13

### P/F Procedure on Half Duplex Line 1


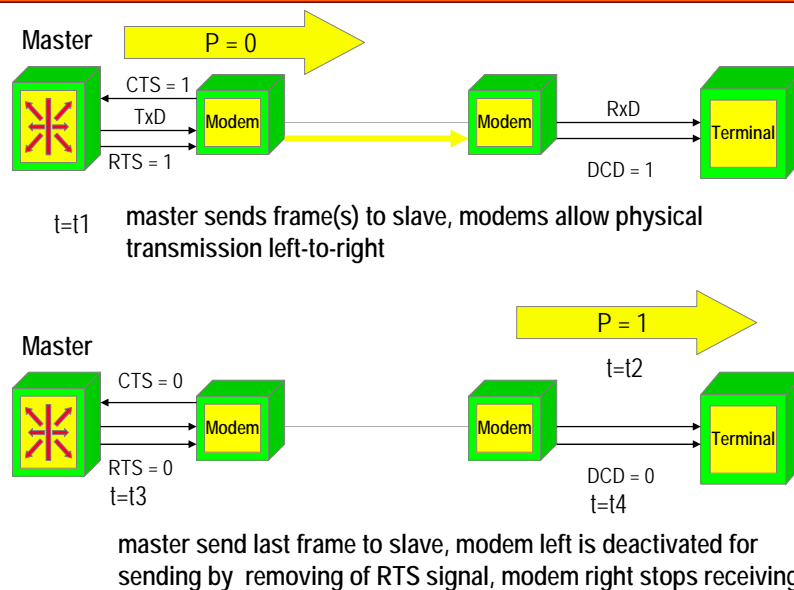


© 2007, D.I. Manfred Lindner

HDLC, v4.4

14

## Appendix 1 - HDLC in Detail

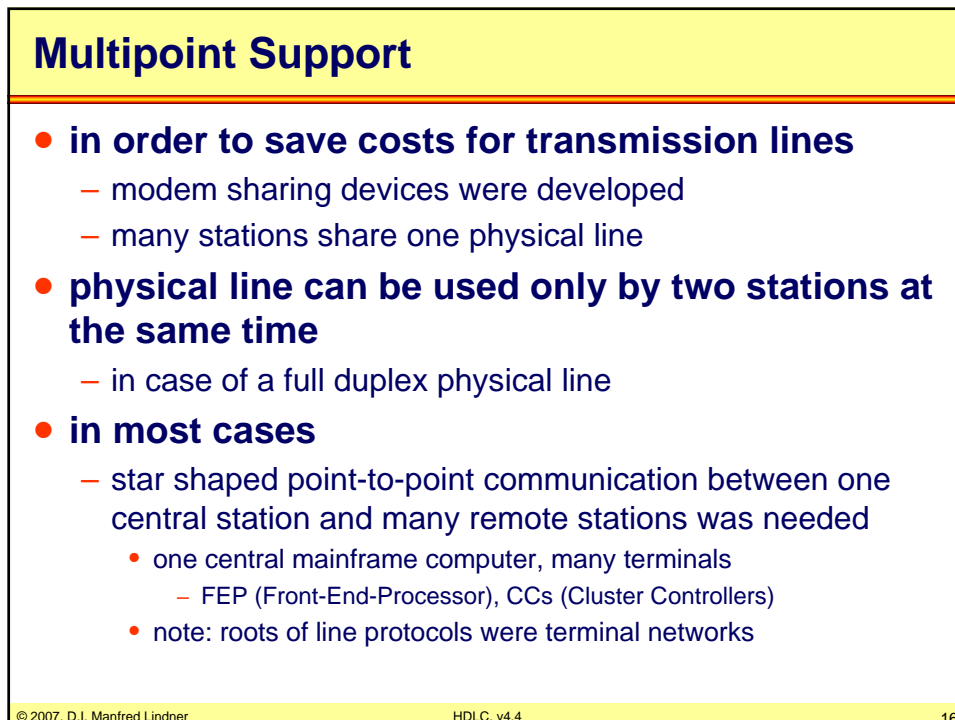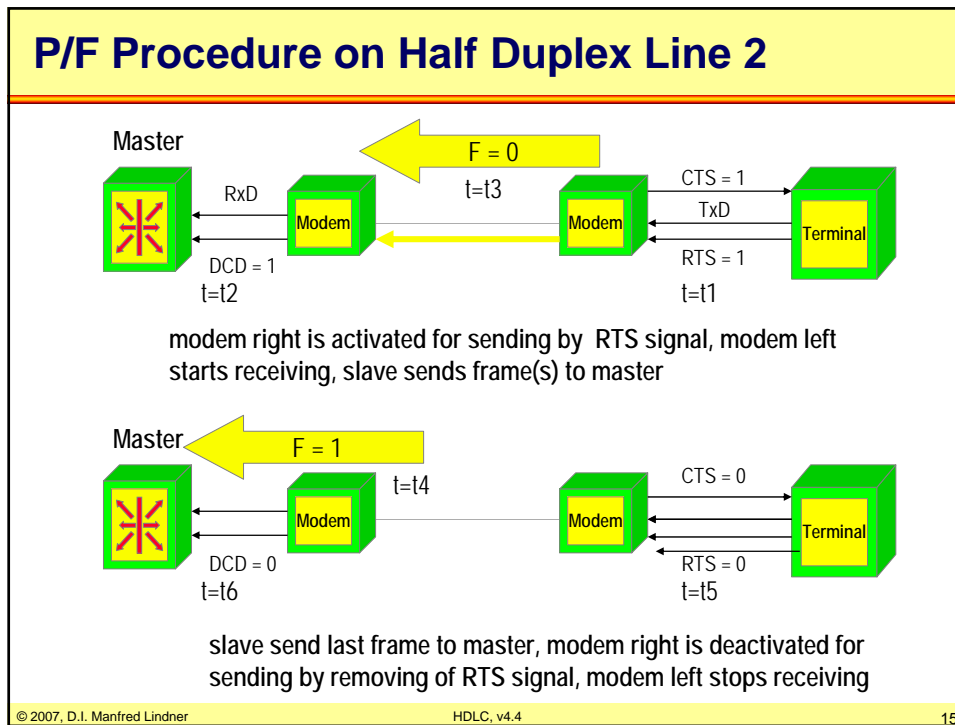



## Appendix 1 - HDLC in Detail

### P/F Procedure


- **simple station hierarchy was sufficient for star shaped communication**
  - central station is master of multipoint line
  - remote stations are slaves of multipoint line
  - slaves can not communicate among each other
- **master of multipoint line**
  - is responsible for control of multipoint line
- **control is done by P(oll)/F(inal) procedure**
  - P invites a slave to transmit frame(s) to the master
  - F marks last frame sent by a slave
  - slave identification is done by an address

© 2007, D.I. Manfred Lindner

HDLC, v4.4

17

### P/F Procedure on Multipoint Line 1

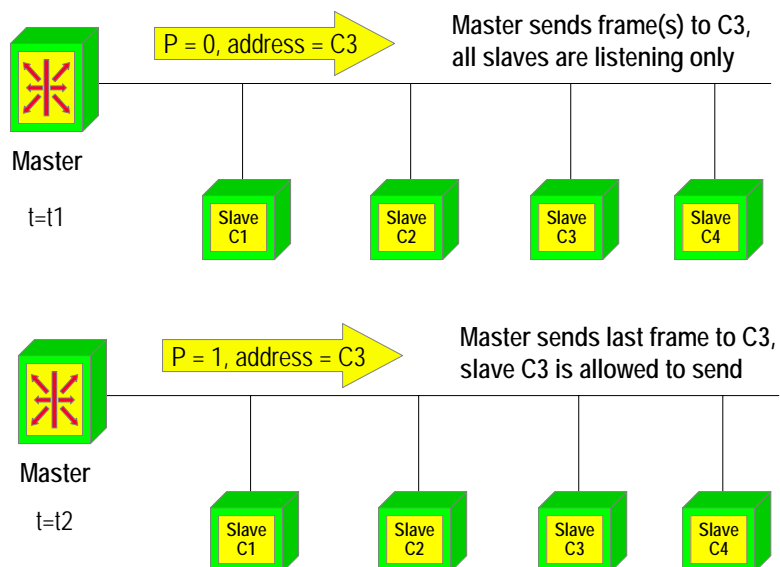



© 2007, D.I. Manfred Lindner

HDLC, v4.4

18



## Appendix 1 - HDLC in Detail

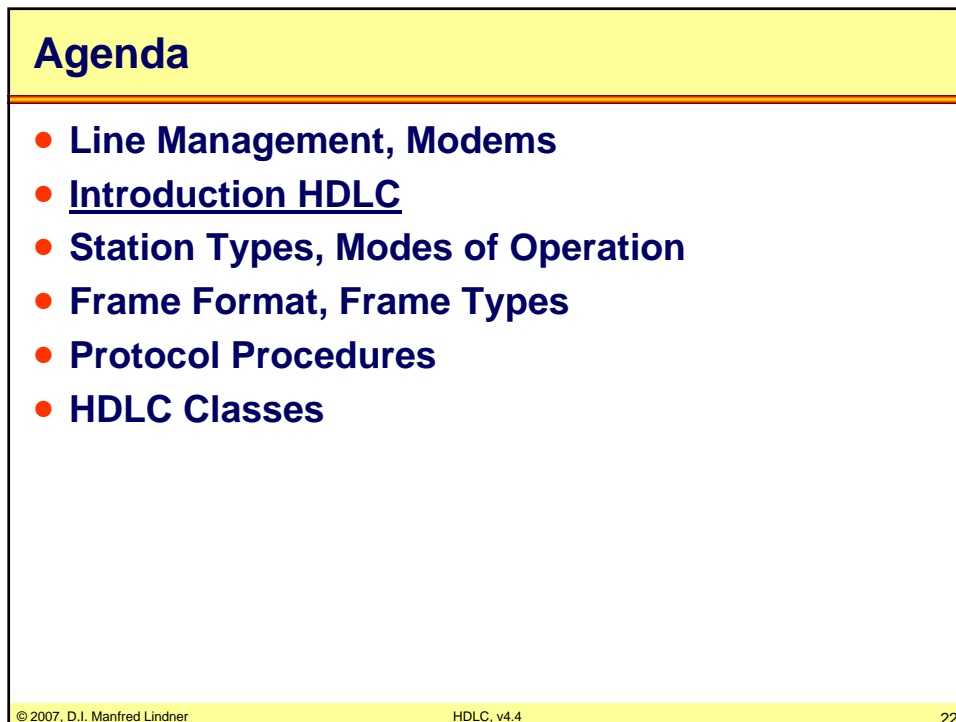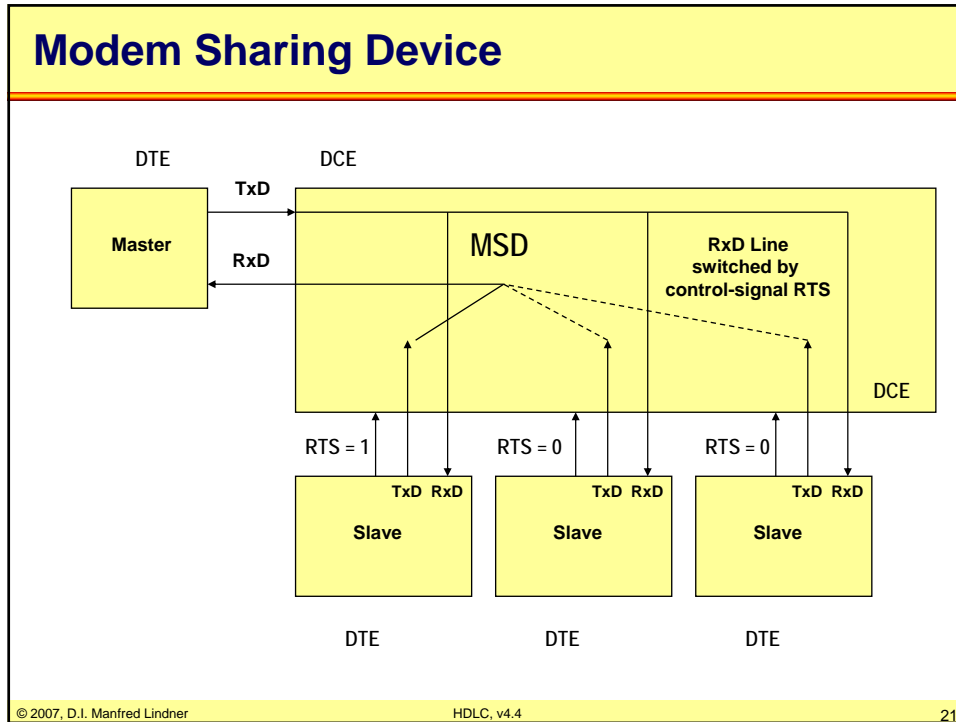

## Appendix 1 - HDLC in Detail

### HDLC

- **High-level Data Link Control**
- **most widely used data link control protocol based on building elements**
  - synchronous transmission
  - bit-oriented line protocol using bitstuffing
  - Continuous RQ with GoBackN, piggybacked ACK
  - P/F procedure
- **provides many options**
  - half-duplex and full-duplex transmission
  - point-to-point and multipoint configuration
  - switched or non-switched channels

© 2007, D.I. Manfred Lindner

HDLC, v4.4

23

### HDLC

- **covers therefore a broad range of applications**
- **HDLC roots are**
  - terminal networks
- **because of the universal procedures**
  - successful also in computer networks
- **HDLC standardization was done by ISO**
- **has been used as a basis for a number of other data link layer protocols**

© 2007, D.I. Manfred Lindner

HDLC, v4.4

24

## Appendix 1 - HDLC in Detail

### HDLC Family

- **LAPB - Link Access Procedure Balanced**
  - link layer protocol for X.25
- **LAPD - Link Access Procedure D-Channel**
  - ISDN
- **V.120 - used on ISDN terminal adapters for multiplexing**
- **LAPM - Link Access Procedure for Modems**
- **PPP - Point-to-Point Protocol**
  - encapsulates network PDUs and identifies protocol type
- **SDLC - Synchronous Data Link Control (IBM)**

```

graph TD
    HDLC[HDLC] --- LAPB["LAPB (X.25)"]
    HDLC --- LAPD["LAPD (ISDN)"]
    HDLC --- V120["V.120 (ISDN)"]
    HDLC --- LLC["LLC (LANs)"]
    HDLC --- LAPM["LAPM (V.42)"]
    HDLC --- FR["Frame Relay"]
    HDLC --- PPP[PPP]
    HDLC --- SDLC["SDLC (SNA)"]
    
```

© 2007, D.I. Manfred Lindner HDLC, v4.4 25

### Standards HDLC and Family

- **HDLC standards**
  - ISO 3309 HDLC frame structure
  - ISO 4335 HDLC elements of procedure
  - ISO 7478 HDLC multilink procedures (MLP)
  - ISO 7809 HDLC class of procedures
  - ISO 8885 HDLC exchange data link identification (XID)
- **Family**
  - ISO 7776 LAPB
  - ISO 8471 LAPB address information
  - ISO 8802/2 LLC
  - ITU-T I.441 LAPD

© 2007, D.I. Manfred Lindner HDLC, v4.4 26

## Appendix 1 - HDLC in Detail

### Agenda

- Line Management, Modems
- Introduction HDLC
- Station Types, Modes of Operation
- Frame Format, Frame Types
- Protocol Procedures
- HDLC Classes

### Primary / Secondary Station

- **primary station**
  - acts as a master
  - transmits command frames
  - receives response frames
  - maintains a separate session with each station on multipoint line
- **secondary station**
  - acts as a slave to the primary station
  - receive command frames
  - transmits response frames
  - secondary stations cannot communicate directly

## Appendix 1 - HDLC in Detail

### Line Configuration Unbalanced Mode


- **unbalanced mode**
  - one primary and one or more secondary stations
  - primary is responsible for controlling each secondary
  - primary establishes and maintains the link and is responsible for triggering error recovery
  - can be used on point-to-point and multipoint lines
- **addressing**
  - secondary stations only have an address
  - command frames contain address of selected secondary station
  - response frames contain address of responding secondary station

© 2007, D.I. Manfred Lindner

HDLC, v4.4

29

### Unbalanced Mode / HDLC Addressing

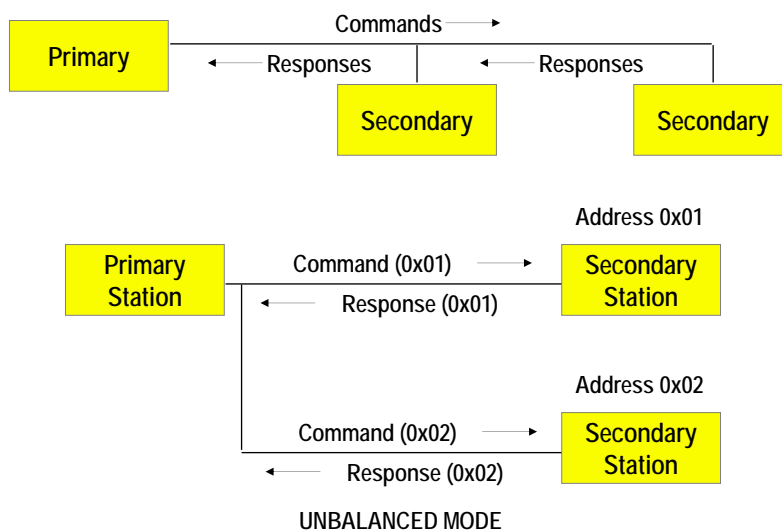

© 2007, D.I. Manfred Lindner

HDLC, v4.4

30

## Appendix 1 - HDLC in Detail

### Line Configuration Balanced Mode

- **balanced mode**
  - can be used on point-to-point lines only
  - stations are peers on the link and share equal responsibility for error recovery and line management
  - combined station type is required
- **for peers with equal responsibility**
  - a new type of station was necessary
  - combined station

© 2007, D.I. Manfred Lindner

HDLC, v4.4

31

### Combined Station

- **combined station**
  - contains protocol components of primary and secondary in one physical station
  - transmits both commands and responses
  - receives both commands and responses
  - uses line addresses to distinguish between command and response frames
    - frame received with own address -> command
    - frame received with partner address -> response
    - frame transmitted with own address -> response
    - frame transmitted with partner address -> command



© 2007, D.I. Manfred Lindner

HDLC, v4.4

32



## Appendix 1 - HDLC in Detail

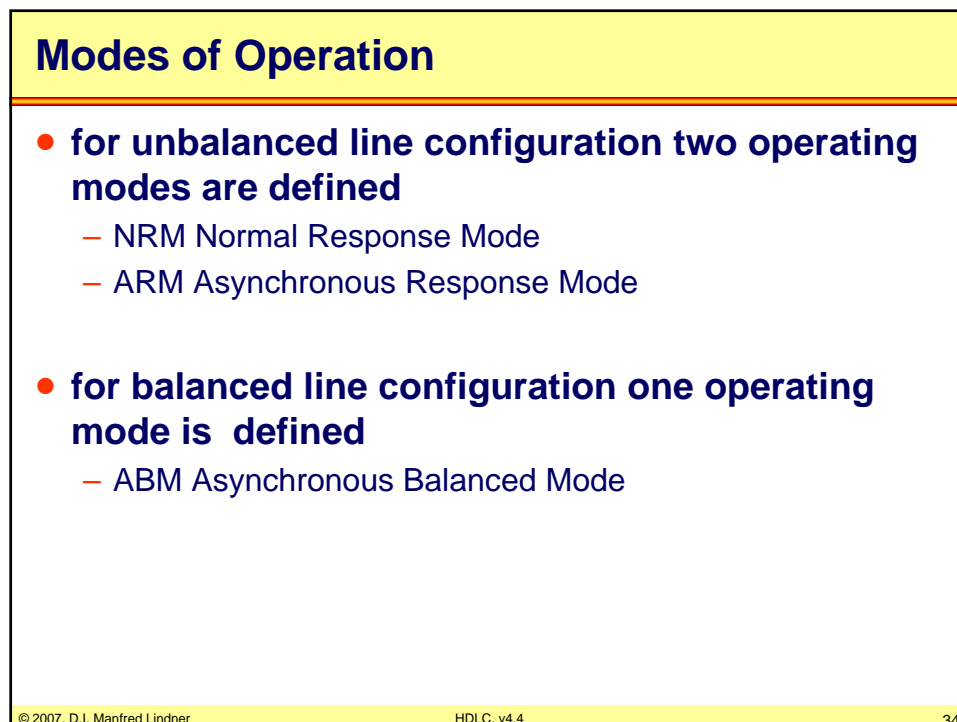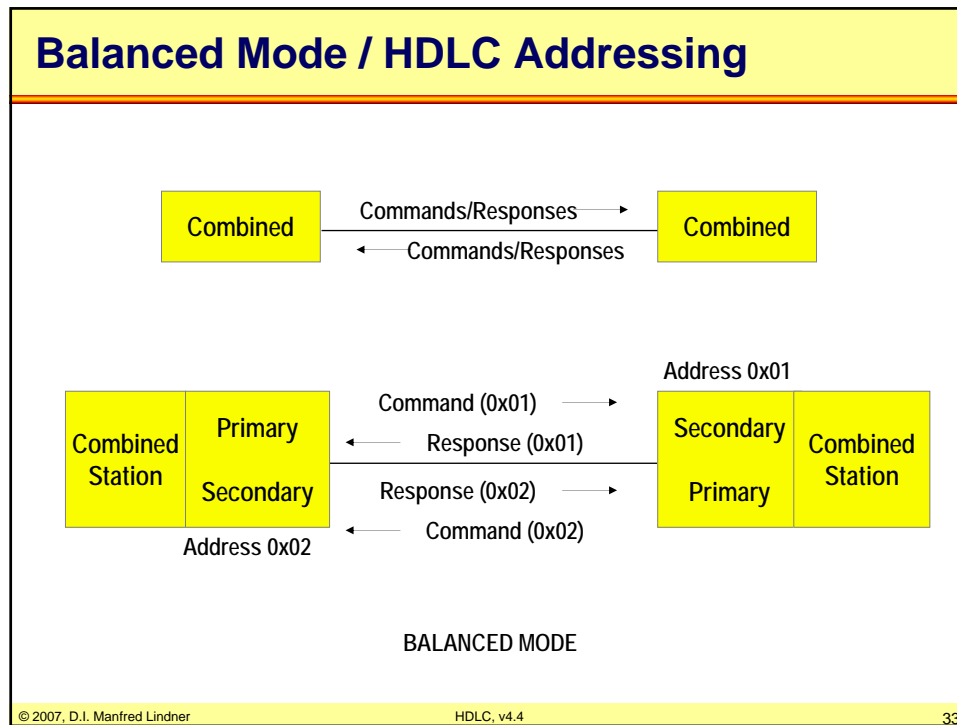

## Appendix 1 - HDLC in Detail

### Modes of Operation

- **Normal Response Mode - NRM**

- requires the secondary to receive explicit permission from the primary before transmitting
- after permission, secondary initiates a response transmission that may contain data
- the last response frame returns the permission for transmitting to the primary
- after the last frame transmission, secondary must again wait for explicit permission
- polling done by primary
- mode best suited to half duplex physical lines and used frequently on multipoint lines

### Modes of Operation

- **Asynchronous Response Mode - ARM**

- allows a secondary to initiate transmission without explicit permission from the primary
- a full duplex physical line is necessary
- can reduce overhead because secondary does not need to wait for polling sequence
- primary still responsible for line management and triggering of error recovery
- on multipoint lines only one secondary can be in ARM mode
- ARM is used very little today

## Appendix 1 - HDLC in Detail

### Modes of Operation

- **Asynchronous Balanced Mode - ABM**

- uses combined stations
- station may initiate transmission without prior permission from the other station
- both stations are equally responsible for error recovery and can establish and clear a connection
- ABM is the best choice for point-to-point links

### Non Operational Modes

- **Normal Disconnected Mode - NDM**

- for unbalanced mode
- secondary not ready to receive any I or S frame

- **Asynchronous Disconnected Mode - ADM**

- for balanced mode
- combined station not ready to receive any I or S frame

- **Initialization Mode - IM**

- used for initialization of stations (download of software) or exchange of parameters between stations
  - e.g. SNA NCP download using U frames of type RIM or SIM

## Appendix 1 - HDLC in Detail

### Agenda

- Line Management, Modems
- Introduction HDLC
- Station Types, Modes of Operation
- Frame Format, Frame Types
- Protocol Procedures
- HDLC Classes

### Frame Format

- **an HDLC frame consists of**
  - flag fields (F) - 8 bit
  - address field (A) - 8 or 16 bit
    - in unbalanced mode, commands AND responses contain the address of the secondary station
    - in balanced mode, commands contain the receiver address and responses contain the sender address
  - control field (C) - 8 or 16 bit
    - contains frame type and corresponding protocol elements
  - information field (I) - variable, not used in some frames
    - contains the actual data
  - frame check sequence (FCS) - 16 or 32 bit
    - uses standard CRC-16, CRC-32

## Appendix 1 - HDLC in Detail

### Frame Format

- **special sequences**
  - flag      01111110 (7E hex)
  - abort     at least 7, but fewer than 15 Ones
  - idle      15 or more Ones
- **HDLC is code transparent**
  - uses bit stuffing (zero insertion) if flag sequence would appear within frame
- **control field**
  - three formats and hence three principle frame types
    - I (Information) format    -> I - frame
    - S (Supervisory) format   -> S - frame
    - U (Unnumbered) format   -> U - frame

© 2007, D.I. Manfred Lindner      HDLC, v4.4      41

### HDLC Frame Format

hex7E	8-16 bits	8-16 bits		16 or 32 bits	hex7E
Flag (F)	Address (A)	Control (C)	Information (I)	FCS	Flag (F)
01111110					01111110

0	Send Sequence Number N(S)	P/F	Receive Sequence Number N(R)	Information Frame, I-Frame
1	0	Supervisory Code	Receive sequence number N(R)	Supervisory Frame, S-Frame
1	1	Code	Code	Unnumbered Frame, U-Frame

| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 |

**P/F = Poll Bit in command frame**  
**P/F = Final Bit in response frame**

© 2007, D.I. Manfred Lindner      HDLC, v4.4      42

## Appendix 1 - HDLC in Detail

### Supervisory Frames

1	0	Supervisory Code	P/F	Receive Sequence Number N(R)
		0 0		RR (Receiver Ready)
		0 1		REJ (Reject)
		1 0		RNR (Receiver Not Ready)
		1 1		SREJ (Selective Reject)

© 2007, D.I. Manfred Lindner HDLC, v4.4 43

### Unnumbered Frames

1	1	Code	P/F	Code	Command	Response
		0 0		0 0 0	UI	UI
		0 0		0 0 1	SNRM	
		0 0		0 1 0	DISC	RD
		0 0		1 0 0	UP	
		0 0		1 1 0		UA
		0 1		0 0 0	NR0	NR0
		0 1		0 0 1	NR1	NR1
		0 1		0 1 0	NR2	NR2
		0 1		0 1 1	NR3	NR3
		1 0		0 0 0	SIM	RIM
		1 0		0 0 1		FRMR
		1 1		0 0 0	SARM	DM
		1 1		0 0 1	RSET	
		1 1		0 1 0	SARME	
		1 1		0 1 1	SNRME	
		1 1		1 0 0	SABM	
		1 1		1 0 1	XID	XID
		1 1		1 1 0	SABME	

© 2007, D.I. Manfred Lindner HDLC, v4.4 44



## Appendix 1 - HDLC in Detail

### HDLC Data Link Services

- **HDLC can provide connection-oriented service**
  - setup of connection done by U-frames
    - SNRM, SARM, SABM, UA
  - I-frames and S-frame can be used only after connection setup
    - I, RR, RNR, REJ, SREJ
  - clearing of a connection done by U-frames
    - DISC, UA
- **HDLC can provide connectionless service**
  - only U-frames can be used
    - UI for data transport

© 2007, D.I. Manfred Lindner

HDLC, v4.4

47

### I - Frames

- **are used to transmit user data between stations**
  - requires connection setup
  - Send Sequence Number N(S)
  - Receive Sequence Number N(R)
    - piggyback acknowledgement
  - range of sequence numbers (3 bit)
    - normal mode (SNRM, SARM, SABM)
    - 0 - 7
    - maximum send window = 7
  - range of sequence numbers (7 bit)
    - extended mode (SNRME, SARME, SABME)
    - 0 - 127
    - maximum send window = 127

© 2007, D.I. Manfred Lindner

HDLC, v4.4

48



## Appendix 1 - HDLC in Detail

### S - Frames

- **perform control functions**

- like acknowledgement, request for retransmission, flow control
- usage depends on the operation mode / class of procedures
- Receiver Ready (RR) is used as acknowledgement in case no I frame is waiting to transmit
- additionally RR indicates that station can accept frames (flow control - GO)
- Receiver Not Ready (RNR) indicates that a station is temporarily not ready to receive frames (flow control - STOP) but also used to acknowledge
- RR and RNR can be used for keepalive, RR can be used for polling in case of NRM

© 2007, D.I. Manfred Lindner

HDLC, v4.4

49

### Error Recovery with Checkpointing

- **request for retransmission**

- is done with checkpointing
- primary triggers with P = 1 exchange information of current/actual state of N(R) numbers
- retransmission in case of missing acknowledgements
  - GoBackN with N = N(R)
- delayed or triggered GoBackN
  - no explicit NACK frame used
  - RR or RNR contains corresponding N(R) number for GoBackN

- **checkpointing is**

- basic error recovery method for all HDLC operational modes

© 2007, D.I. Manfred Lindner

HDLC, v4.4

50

## Appendix 1 - HDLC in Detail

### Error Recovery with REJ / SREJ

- **optional methods for error recovery use reject (REJ) or selective reject (SREJ) frames**
- **REJ can be used to initiate retransmission as soon as error is recognized**
  - REJ is real NACK frame
  - it is not necessary to wait for triggering of checkpoint done by primary
  - GoBackN with  $N = N(R)$  of REJ frame
- **SREJ can be used to request selectively retransmission of a frame**
  - requests frame with number  $N(R)$

© 2007, D.I. Manfred Lindner

HDLC, v4.4

51

### The P/F-Bit

- **use of P/F-bit depends on mode of operation**
  - NRM, ARM, ABM
- **name of P/F-bit (P = poll, F= final)**
  - can be explained with its original usage in NRM mode on half duplex physical lines
- **general rule for all modes**
  - bit is a P bit in command frames (the address field contains the address of the receiving station)
  - bit is a F bit in response frames (the address field contains the address of the sending station)
  - only recognized when set to 1

© 2007, D.I. Manfred Lindner

HDLC, v4.4

52

## Appendix 1 - HDLC in Detail

### The P/F-Bit

- **general rule for all modes (cont.)**
  - primary station uses the P bit to trigger a response from the secondary
  - secondary station uses the F bit to indicate the corresponding response
  - if primary station has sent a command with  $P = 1$ , the primary must wait until secondary has sent a response frame with  $F = 1$ , before a new command with  $P = 1$  can be transmitted
  - this exchange of P and F marks a synchronization point for error recovery -> checkpointing

© 2007, D.I. Manfred Lindner

HDLC, v4.4

53

### P/F-Bit in NRM Mode

- **used for exchange of transmission right (Token) between primary and secondary**
  - primary station gives Token to secondary station with a command frame and  $P = 1$  (primary polls secondary)
  - after a command frame with  $P = 1$  is received the secondary station can send a sequence of response frames to the primary with  $F = 0$
  - the last response frame is marked with  $F = 1$  and returns the Token back to the primary station
  - after a response frame with  $F = 1$  is received the primary station can use the half duplex link again
- **used for checkpointing**
  - the adequate error recovery method for half duplex lines

© 2007, D.I. Manfred Lindner

HDLC, v4.4

54

## Appendix 1 - HDLC in Detail

### P/F-Bit in ARM/ABM Mode

- **remember:**
  - in ARM or ABM mode secondary station (secondary component in case of combined station) can transmit without explicit permission by the primary
  
- **P/F - bit used to trigger error recovery only**
  - if primary station sends a command frame with  $P = 1$  the secondary should send a response frame with  $F = 1$  as soon as possible
  - checkpoint marking

© 2007, D.I. Manfred Lindner

HDLC, v4.4

55

### Checkpointing in ARM/ABM mode

- **checkpointing method**
  - ARM: whenever a frame with  $P = 1$  or  $F = 1$  is received
    - stations perform a check which frames are not acknowledged so far using the  $N(R)$  field of these frames
    - if there are any unacknowledged frames retransmission is started with GoBackN method ( $N =$  value of received  $N(R)$ )
  - in ABM mode this is done only if a frame with  $F = 1$  is received
    - combined station contains primary and secondary component
  
- **checkpointing is of course the adequate error recovery method for NRM**
  - combined with Token exchange for half duplex control

© 2007, D.I. Manfred Lindner

HDLC, v4.4

56

## Appendix 1 - HDLC in Detail

### U - Frames

- **are used for control purposes**
  - like link establishment
    - SNRM (set normal response mode), SARM, SABM
    - UA (unnumbered acknowledgement)
    - SNRME, SARME, SABME (E ... extended sequence numbers)
  - link disconnection
    - DISC, RD (request disconnect mode)
  - reset of connection
    - FRMR (frame reject), RSET (reset)
  - initialization, testing, exchange ID, signaling mode
    - RIM, SIM, TEST, XID, DM (disconnect mode),
  - connectionless information transfer
    - UI unnumbered information -> datagram service

© 2007, D.I. Manfred Lindner

HDLC, v4.4

57

### Handling of U Frames

- **SNRM, SARM, SABM, SNRME, SARME, SABME**
  - sets secondary station in corresponding mode
  - expected answer: UA
- **DISC**
  - terminates actual mode, expected answer: UA
  - partner station -> NDM, ADM (disconnected mode)
- **DM**
  - response of secondary to every command frame except set mode frames while in disconnected mode
- **RD**
  - station wants that other station issues an DISC command

© 2007, D.I. Manfred Lindner

HDLC, v4.4

58

## Appendix 1 - HDLC in Detail

### Handling of U Frames

- **FRMR**

- response of secondary in case of protocol errors
  - invalid control field
  - invalid N(R)
  - information field too long or not expected in this frame

- **RSET**

- command sent by primary on receipt of FRMR
- resets N(R) = 0 in secondary, resets N(S) = 0 in primary
- expected answer: UA

- **TEST**

- basic link test
- expected answer: UA

© 2007, D.I. Manfred Lindner

HDLC, v4.4

59

### Handling of U Frames

- **SIM**

- sets secondary in initialization mode
- expected answer: UA
- SW download from primary to secondary with UI frames

- **RIM**

- sent by secondary as response to a mode setting command when secondary wants to be initialized first

- **XID**

- requests identification from other station
- expected answer: XID

© 2007, D.I. Manfred Lindner

HDLC, v4.4

60

## Appendix 1 - HDLC in Detail

### XID Exchange

- **three XID types**


- user data exchange
  - information for upper protocol layers before connection setup
- address resolution
  - used on switched lines only
- parameter negotiation
  - class of procedures
  - functional extensions
  - maximum transmit frame size
  - maximum receive frame size
  - send window
  - receive window

© 2007, D.I. Manfred Lindner

HDLC, v4.4

61

### NRM Example (no errors)

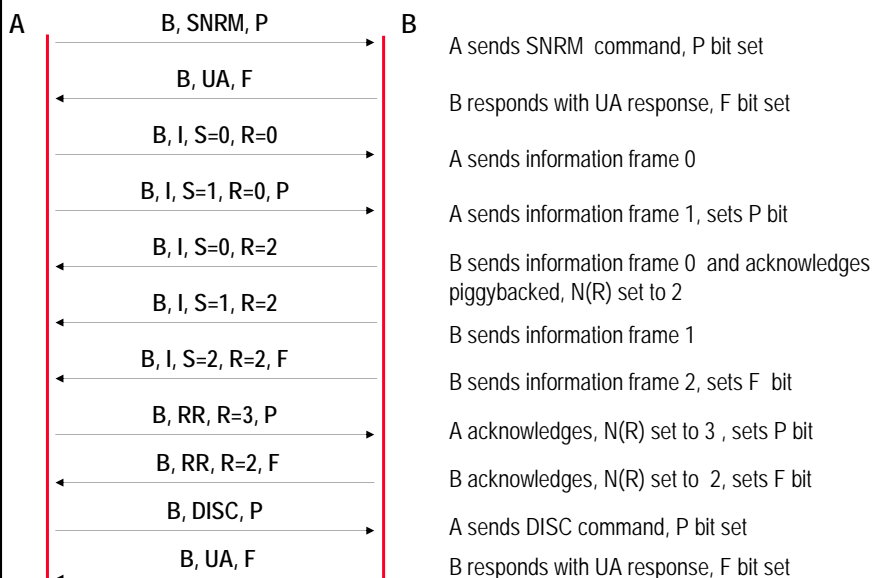

© 2007, D.I. Manfred Lindner


HDLC, v4.4

62

## Appendix 1 - HDLC in Detail


### NRM Example (errors)

- error recovery with checkpointing

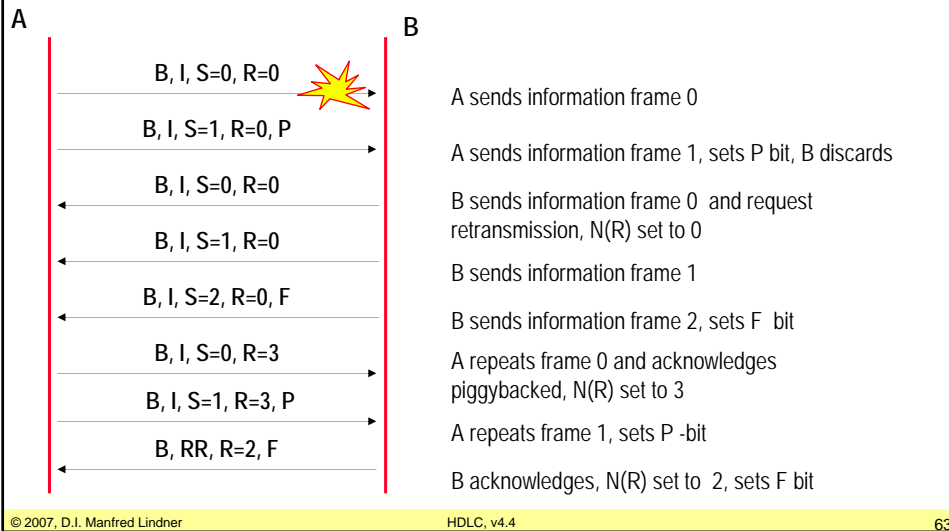

### ABM Example (no errors)

- ABM with data flow from A to B first, then B to A

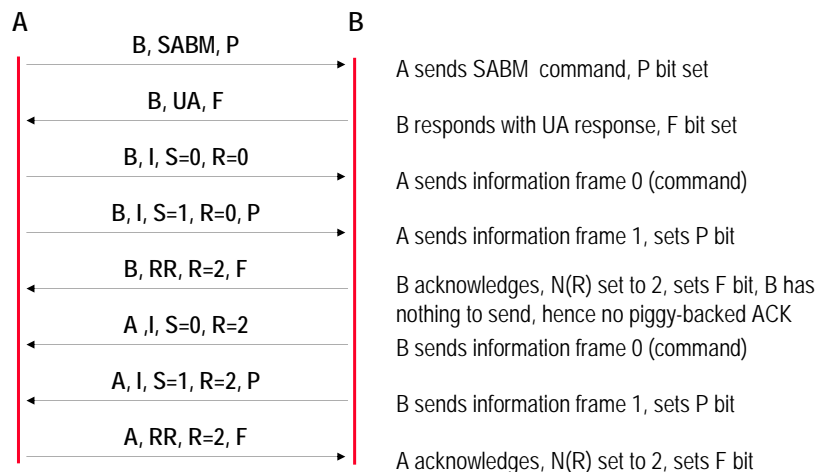




## Appendix 1 - HDLC in Detail

### ABM Example (errors)

- error recovery with checkpointing

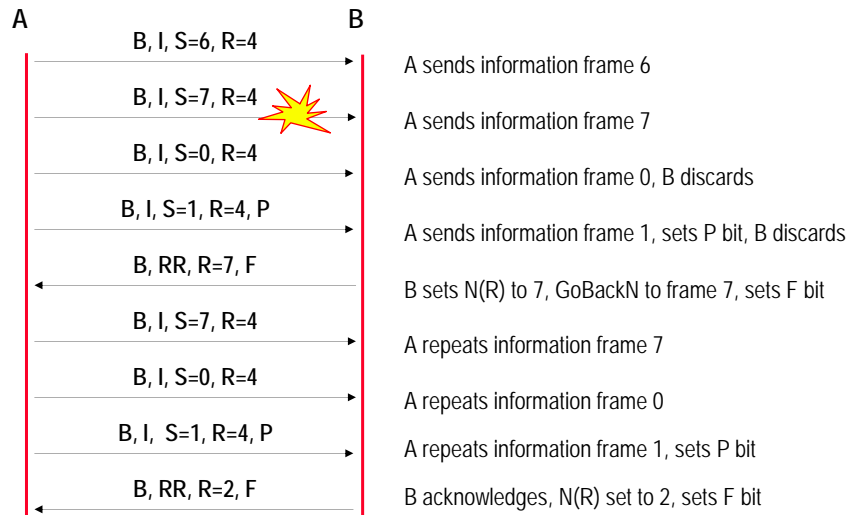


© 2007, D.I. Manfred Lindner

HDLC, v4.4

65

### ABM Example (errors)

- error recovery with REJ frame, disconnect by B

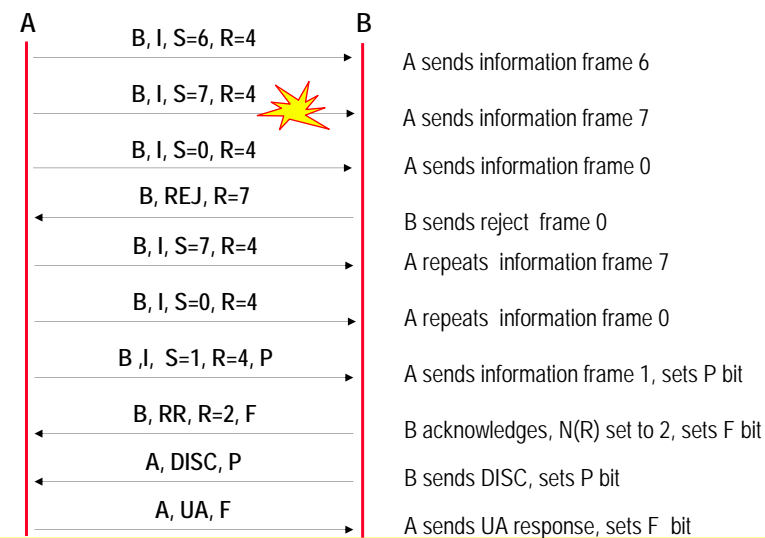

© 2007, D.I. Manfred Lindner

HDLC, v4.4

66

## Appendix 1 - HDLC in Detail

### Agenda

- **Line Management, Modems**
- **Introduction HDLC**
- **Station Types, Modes of Operation**
- **Frame Format, Frame Types**
- **Protocol Procedures**
- **HDLC Classes**

© 2007, D.I. Manfred Lindner

HDLC, v4.4

67

### HDLC Classes of Procedures

- **used to classify HDLC implementations**
  - basic repertoire (standard modes of operation)
    - Class UN (NRM), Class UA (ARM), Class BA (ABM)
    - must be implemented for HDLC standard compliance
  - functional extensions (see next page)
    - may be implemented, matter of negotiations between implementers

Unbalanced Normal (UN)		Unbalanced Asynchronous (UA)		Balanced Asynchronous (BA)	
Primary	Secondary	Primary	Secondary	Primary	Secondary
Command	Response	Command	Response	Command	Response
I	I	I	I	I	I
RR	RR	RR	RR	RR	RR
RNR	RNR	RNR	RNR	RNR	RNR
SNRM	UA	SARM	UA	SABM	UA
DISC	DM	DISC	DM	DISC	DM
	FRMR		FRMR		FRMR

© 2007, D.I. Manfred Lindner

HDLC, v4.4

68

## Appendix 1 - HDLC in Detail

HDLC Functional Extensions		
1. for switched circuits XID << ADD >> XID RD	7. extended addressing	13. request disconnect ADD >> RD
2. for 2-way simultaneous REJ << ADD >> REJ	8. delete "Response" I frames	14. 32 bit FCS
3. for single frame retrans. SREJ << ADD >> SREJ	9. delete "Command" I frames	for example UN 3.7 -> unbalanced normal -> mode and selective -> reject and extended -> address extensions
4. for information UI << ADD >> UI	10. extended sequence numbering	
5. for initialization SIM << ADD >> RIM	11. for mode reset RESET << ADD	
6. for group polling UP << ADD	12. Data link test TEST << ADD >> TEST	

© 2007, D.I. Manfred Lindner HDLC, v4.4 69